


# Driehoekafstandhouder type A > A


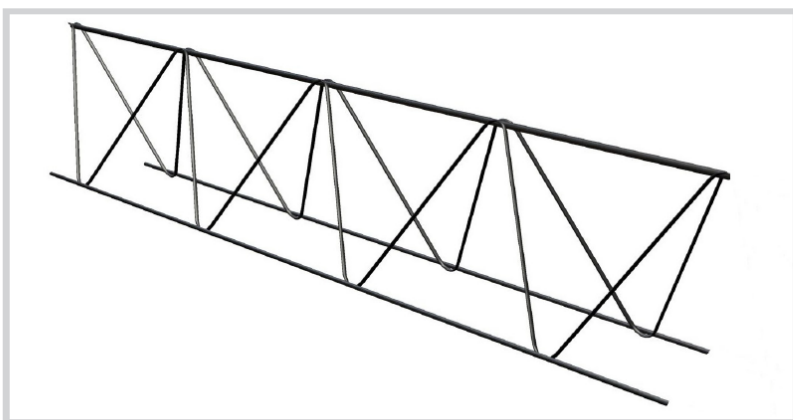


H (mm)	Breedte (mm)	Onderverpakking	Commerciële verpakking (palet)
50	75	25	250
60	75	25	250
70	75	25	250
75	75	25	250
80	80	25	250
90	80	25	250
100	80	25	250
105	80	25	250
110	85	25	250
120	85	25	250
130	85	25	250
135	85	25	250
140	85	25	250
150	90	25	250
160	90	25	250
165	90	25	250
170	90	25	250
180	90	25	250
190	90	25	250
200	90	25	250
210	90	20	100
220	90	20	100
230	90	20	100
240	90	20	100
250	90	20	100
260	90	20	100
270	90	20	100
280	90	20	100
290	90	20	100
300	90	20	100

# Driehoekafstandhouder type A > A

310	130	20	50
320	130	20	50
330	130	20	50
340	130	20	50
350	130	20	50
360	130	20	50
370	130	20	50
380	130	20	50
390	130	20	50
400	130	20	50

Hoogte 310 t.e.m. 400 mm op aanvraag.

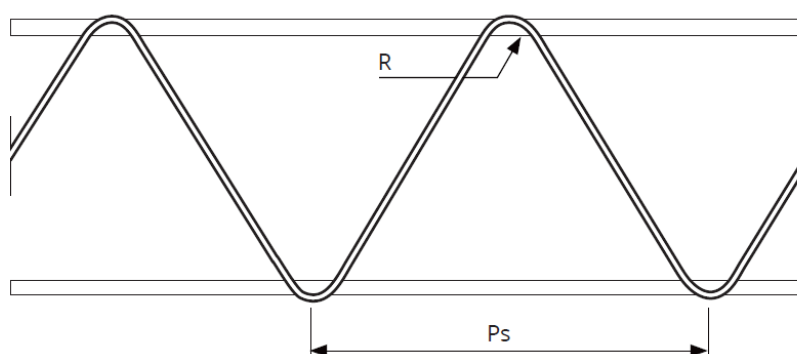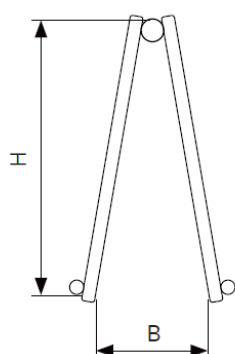

## Draagkracht afstandhouders voor gelijk verdeelde last

Van hoogte 50 mm t.e.m. 200 mm

Tussenafstand	Draagkracht	Benodigde lengte per m <sup>2</sup>
1 m	100 kg/m <sup>2</sup>	1,00 Imp/m <sup>2</sup>
0,8 m	120 kg/m <sup>2</sup>	1,25 Imp/m <sup>2</sup>
0,6 m	160 kg/m <sup>2</sup>	1,70 Imp/m <sup>2</sup>
0,4 m	240 kg/m <sup>2</sup>	2,50 Imp/m <sup>2</sup>

Vanaf 210 mm

Tussenafstand	Draagkracht	Benodigde lengte per m <sup>2</sup>
1 m	120 kg/m <sup>2</sup>	1,00 Imp/m <sup>2</sup>
0,8 m	150 kg/m <sup>2</sup>	1,25 Imp/m <sup>2</sup>
0,6 m	200 kg/m <sup>2</sup>	1,70 Imp/m <sup>2</sup>
0,4 m	300 kg/m <sup>2</sup>	2,50 Imp/m <sup>2</sup>